



CS545—Contents IV

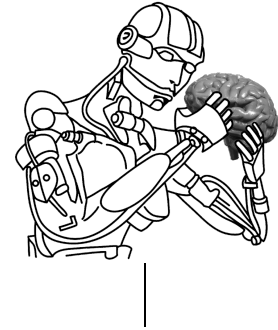

- Frequency Domain Representations
 - Laplace Transform
 - Most important Laplace Transforms
 - Transfer functions
 - Block-Diagram Algebra
 - Examples
- Matlab/Simulink Introduction
 - How to get started
 - The most relevant blocks and settings of Simulink
- Reading Assignment for Next Class
 - See <http://www-clmc.usc.edu/~cs545>

The Laplace Transform

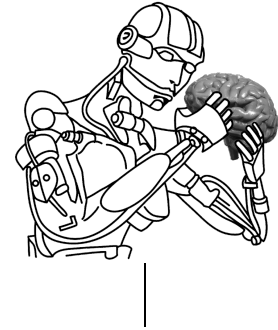


- Properties of Frequency Domain Representations
 - A convenient method so solve (linear!) differential equations (even without a computer ...) by converting them to algebraic equations
 - Makes system analysis easy, even for very big systems
 - Simple mathematics
 - Only applicable for linear time invariant systems!
- The Core of Frequency Domain Analysis:
The Laplace Transform


$$L(f(t)) = f(s) = \int_0^{\infty} f(t)e^{-st} dt$$

where

$$s = \sigma + j\omega \quad \text{and} \quad j = \sqrt{-1}$$

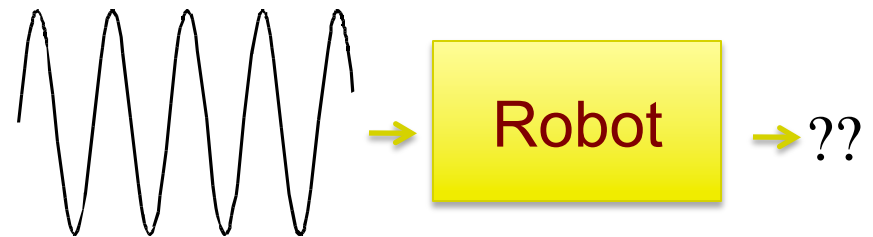

Most Important Laplace Transforms

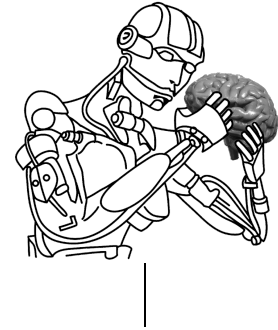

$$L(ax(t)) = aL(x(t)) \quad \text{where } a \text{ is a constant}$$

$$L(x(t)) = x(s)$$

$$L(u(t)) = u(s)$$


$$L(\dot{x}(t)) = sx(s) - x(0) \quad (\text{commonly, } x(0) = 0 ,$$

accomplished by coordinate transformations)

$$L(\ddot{x}(t)) = s^2 x(s) \quad (\text{and analogues for higher derivatives})$$

$$L\left(\int x(t)dt\right) = \frac{1}{s} x(s)$$

Transfer Functions

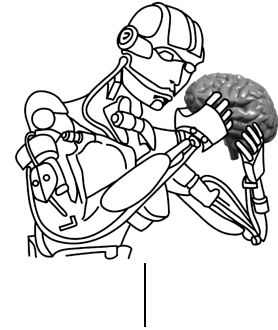

- The Transfer Function describes the Input-Output Relationship of a dynamical system:

$$x(s) = H(s)u(s)$$

- Example I:

Time Domain:


$$\ddot{x} = -b\dot{x} - kx + u$$

Frequency Domain:

$$s^2 x(s) = -bsx(s) - kx(s) + u(s)$$

$$x(s) = \frac{1}{s^2 + bs + k} u(s) = H(s)u(s)$$

Transfer Functions (cont'd)

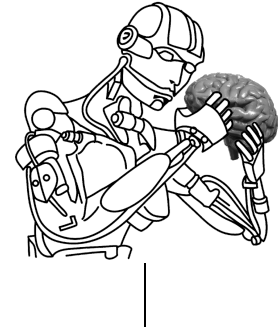

- Example II: An Integrator

$$\dot{x} = u$$


$$sx(s) = u(s) \quad \Rightarrow \quad x(s) = \frac{1}{s} u(s)$$

- Example III: A Simple Low Pass Filter


$$\dot{x} = \alpha(u - x)$$

$$sx(s) = -\alpha x(s) + \alpha u(s) \quad \Rightarrow \quad x(s) = \frac{\alpha}{s + \alpha} u(s)$$

Transfer Functions (cont'd)



- Example IV: A negative Feedback System




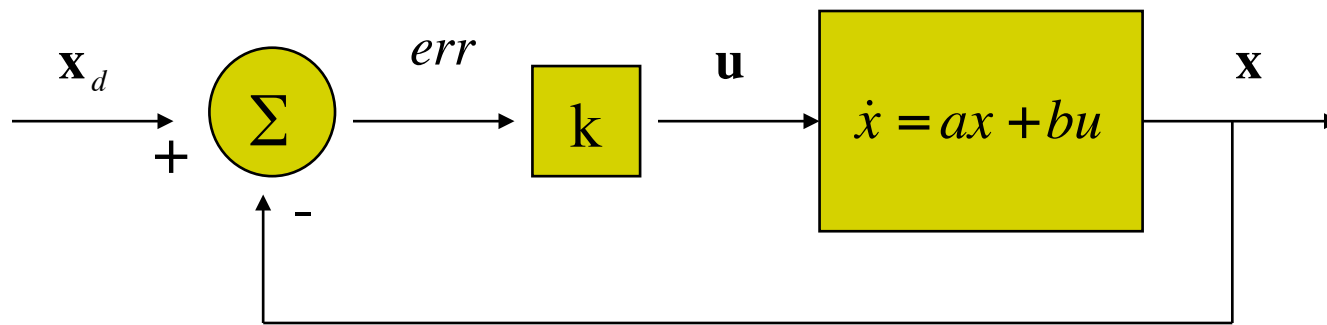


$$\dot{x} = ax + bu = ax + bk(x_d - x)$$


$$sx(s) = ax(s) + bk(x_d(s) - x(s)) = ax(s) + bkx_d(s) - bkx(s)$$

$$x(s) = \frac{bk}{s - a + bk} x_d(s)$$

Block Diagram Algebra

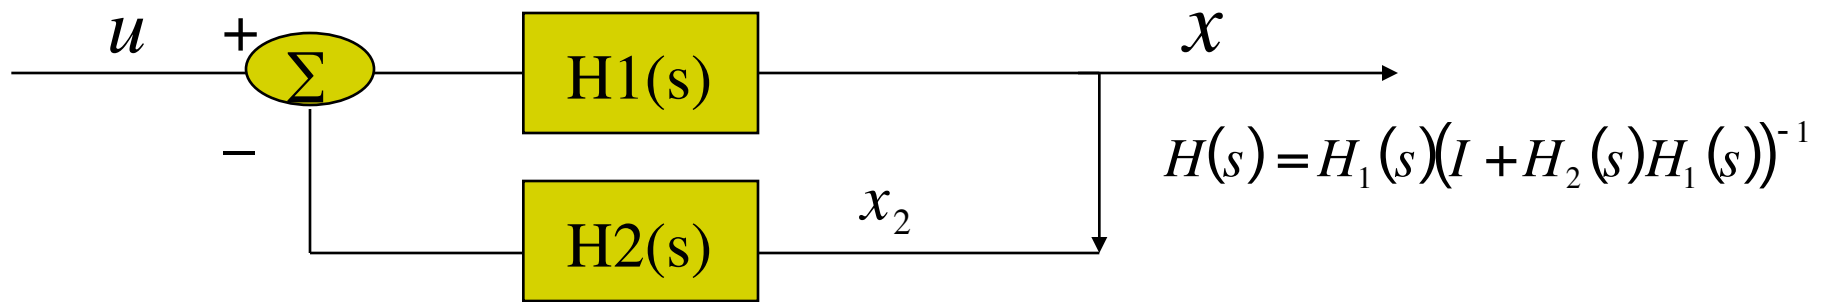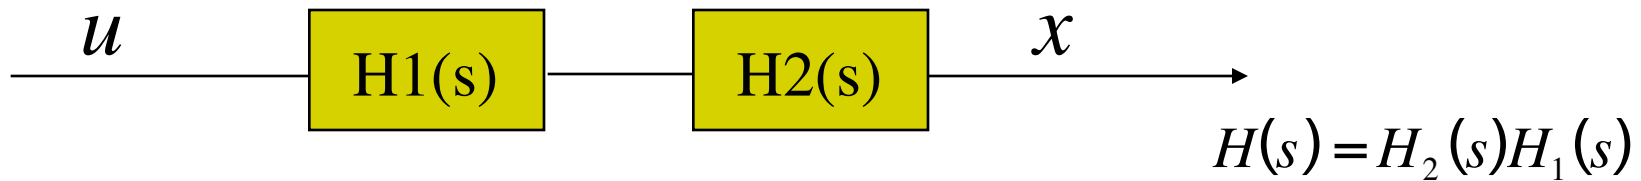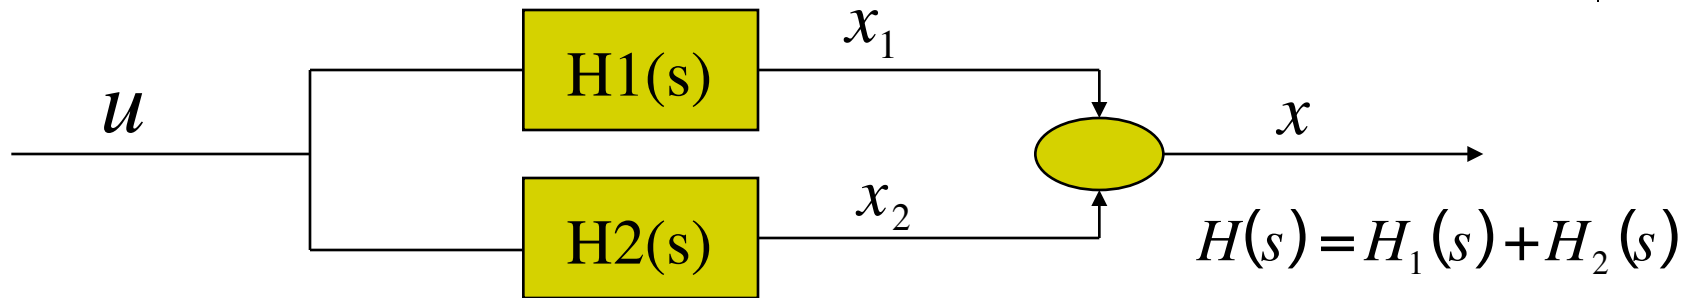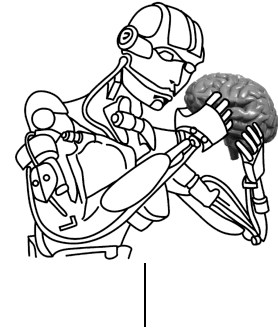

Matlab/Simulink Simulations



- An Example

